
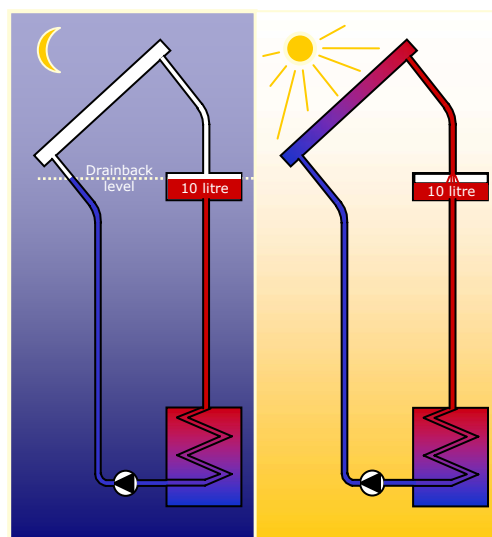


Drain-back tank 10 litre

DESCRIPTION:

- The external drain-back tank will be installed in combination with storage tanks without internal drain-back facility.
- The drain-back tank of 10 litre can be installed in combination with a collector array of maximum 6 m². The capacity of this tank does not allow a larger collector circuit.
- The tank is pressure tested at 4,5 bar and can be used to max. 110°C (max. peak temperature 200°C) and CE marked.
- Always make sure that, before installing, you prepare the work according to current Health and Safety Regulations.

APPLICATIONS: Small domestic hot water systems.

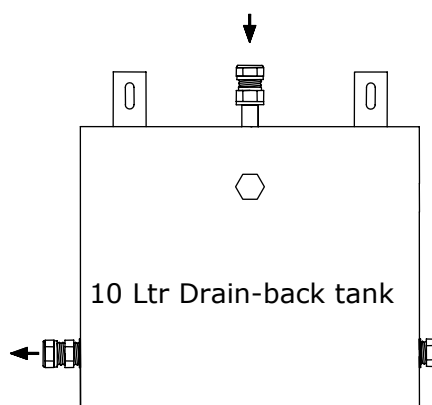


INSTALLATION:

- The 10 litre drain-back tank can be installed in a horizontal position.
- Always install the drain-back tank in a frost-proof area.
- Connect the storage tank and the collector according to the drawings and follow the filling procedure.
- 15mm copper or 15mm galvanized steel (or copper) pipes must be used by the plumber to connect the collector circuit.
- For safety reasons always install a 3 bar pressure relief valve.




- # MANUAL

Installation drain-back tank

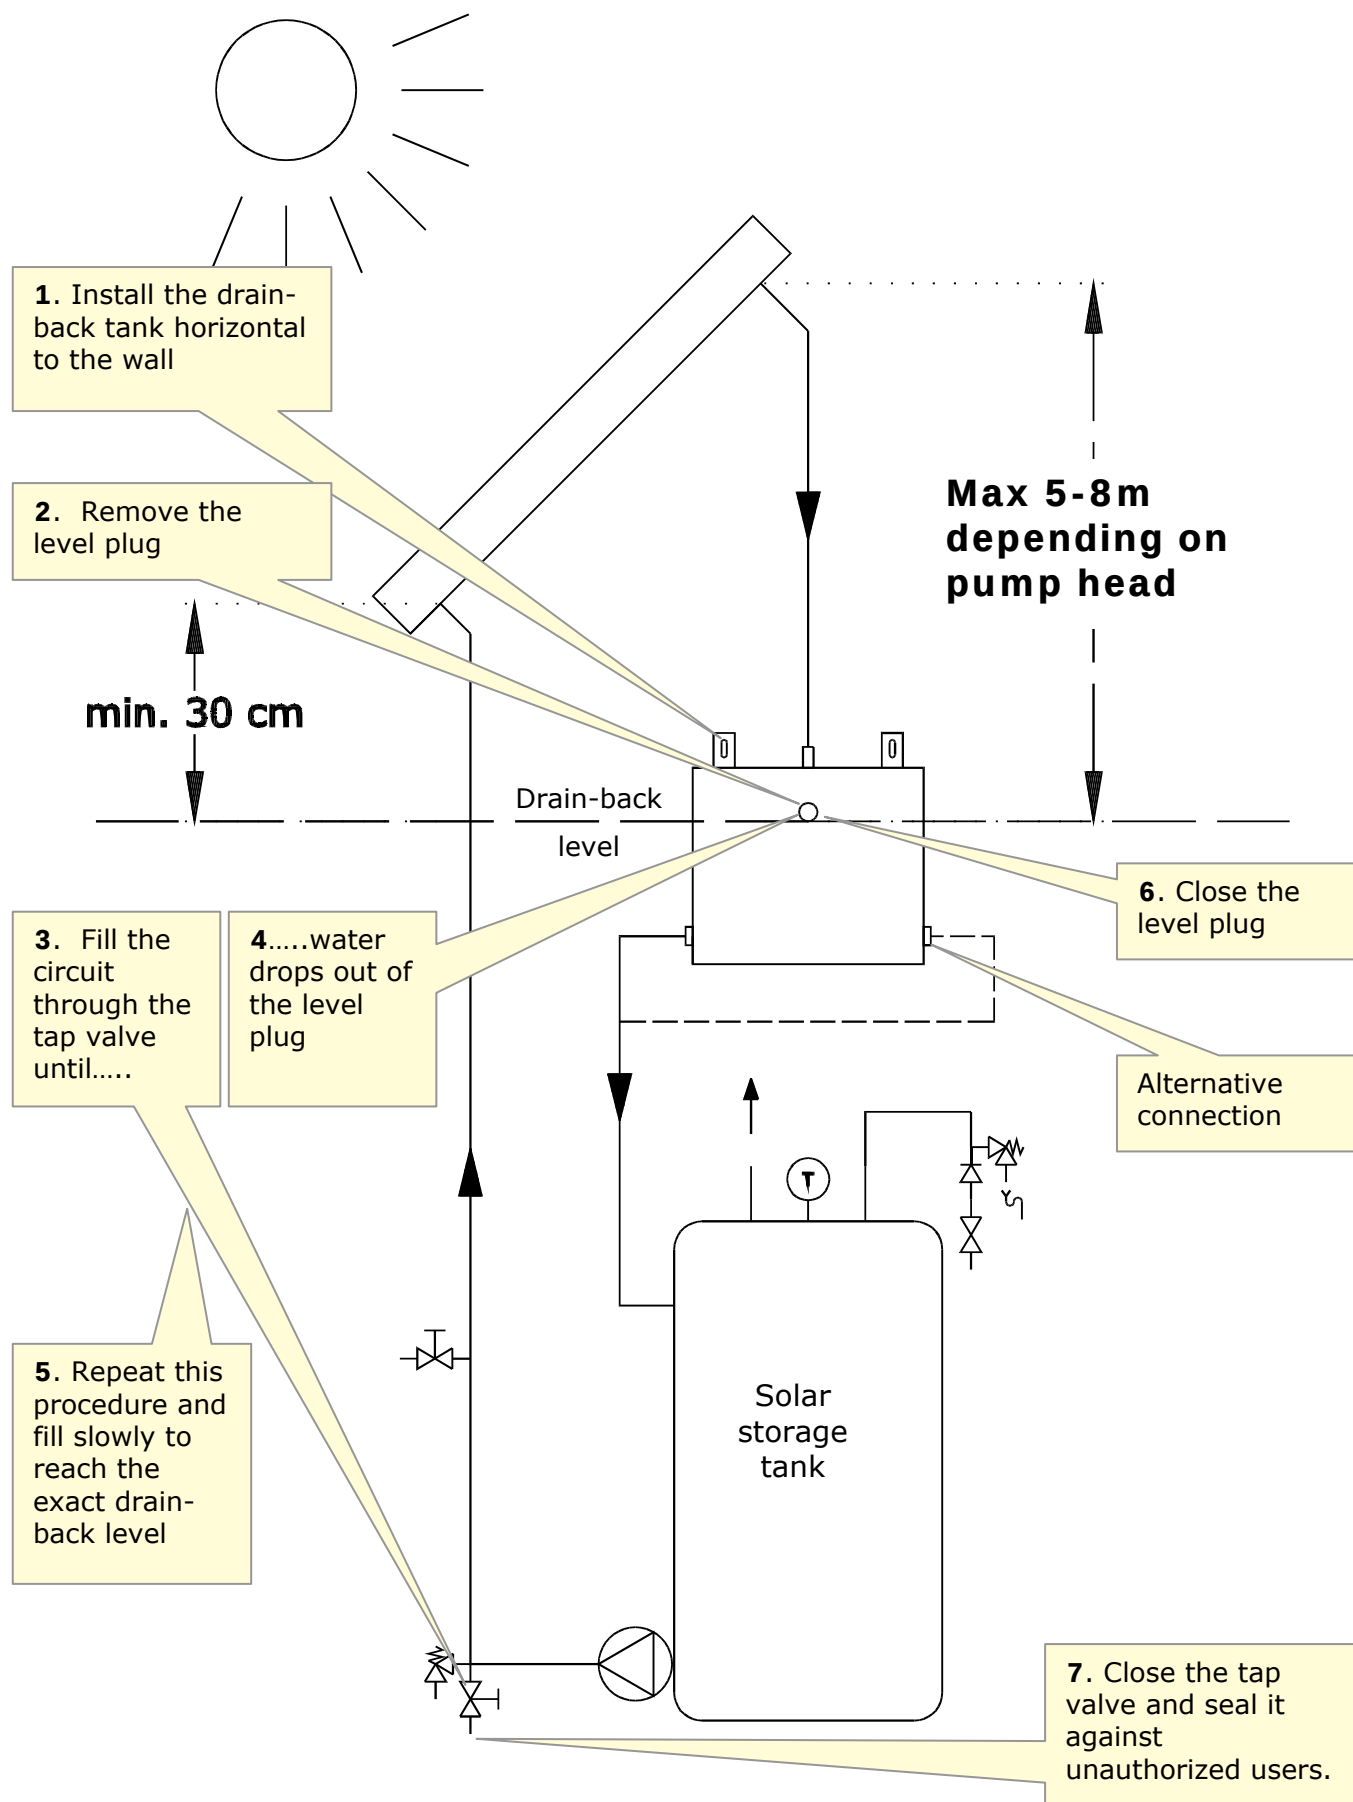

Dimensions 10 litre drain-back tank

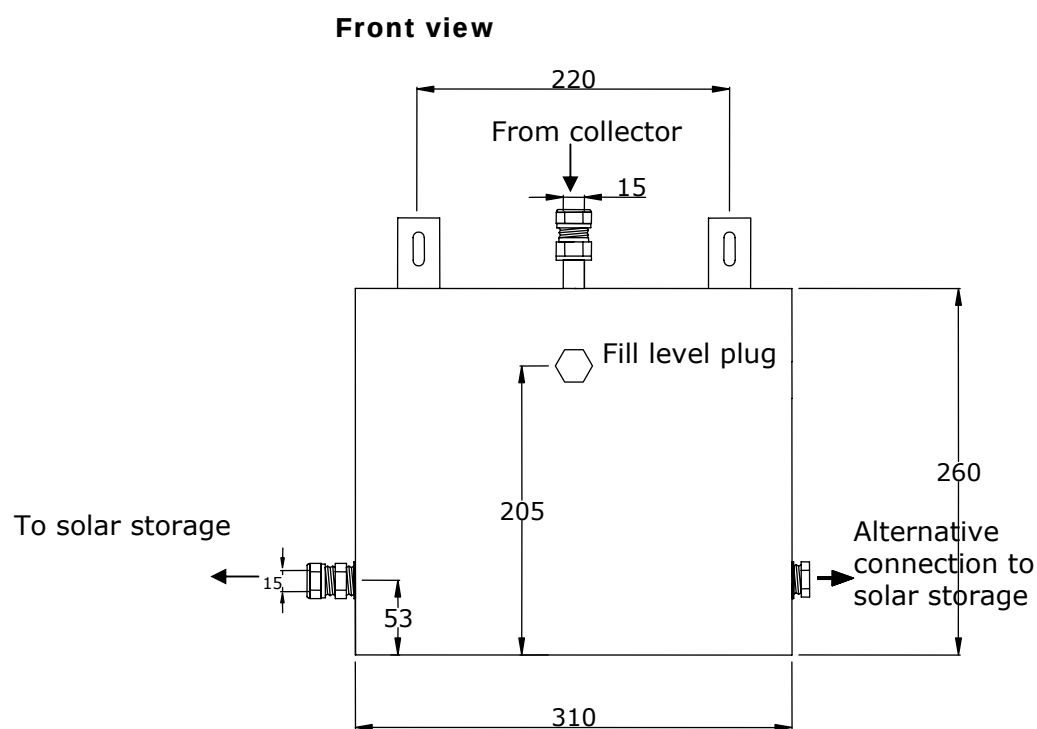

Side view

